


Construction Details of a CFX hose

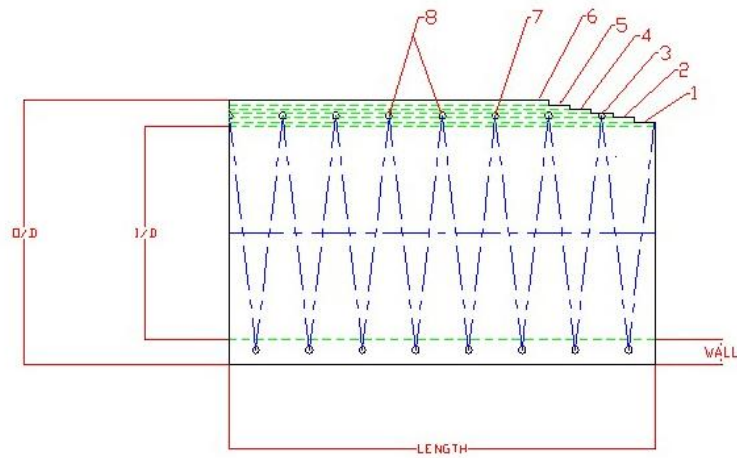

1	1.3mm EXTRUDED / HANDBUILT LINER
2	0.9mm PLY 1 POLYESTER SILICONE
3	0.9mm PLY 2 POLYESTER SILICONE
4	1.3mm SILICONE BEDDING LAYER
5	0.9mm PLY 3 POLYESTER SILICONE
6	0.9mm PLY 4 POLYESTER SILICONE
7	BS2056-1992-316S42 STAINLESS STEEL WIRE
8	WIRE PITCH

Ø in Inches ± 0.008	Ø in mm ± 0.2	O/D ± 0.6mm	WALL ± 0.4mm	BEND RAD in mm	Burst Pressure @ 20°C in BAR	WEIGHT KG/M	VACUUM IN/HG
1/2"	12.7	22.5	6.2	45	40	.40	29"
3/4"	19.05	28.85	6.2	65	40	.60	29"
1"	25.4	35.2	6.2	80	40	.88	29"
1 1/4"	31.8	41.6	6.2	120	40	1.00	29"
1 1/2"	38.1	47.9	6.2	150	40	1.41	29"
2"	50.8	60.6	6.2	180	40	1.66	29"

The table above shows the standard sizes. Other sizes are available upon request.

